



Knife Box

A simple and safe way to store kitchen knives



- Work-Top Cut Out > 115mm x 425mm
- Main Box Housing > 102mm x 412mm x 690mm high
- Collar > 128mm x 436mm (top view on work surface)
- Raising Height > 210mm (approx)
- Top Lid > 100mm x 410mm with 3mm radius corners
- Wood Moduling > Treated with Food-safe Grade natural oil (FDA, USDA approved).



The Knife Box stylishly presents those favourite or special cooking implements close to hand but equally enables them to be stored simply and safely away when not required. It comprises a unique single slot of 3mm width, this S-Box enables any size of knife to be stored in any position. Sharpest knives are duly off the kitchen work surface, not in a kitchen drawer and less accessible to children. The top is hinged for access. There is option for customisation of the top as it is a built-in for each unit.

Every S-Box Knife Box comes with a 3m deep brushed stainless steel top and matching mounting collar as standard. In most designs this works perfectly well. However, to give the designer complete freedom, and an infinite range of options, the top is removable, so it can be replaced with any alternative top material (up to 12mm).



Surface-mount
(simplest 'custom' method)




Inset
(rebated in 30mm+ thick material)




Under-mount
(only suitable for 20mm thick worktop)

4 possible ways of fitting you S-Box.

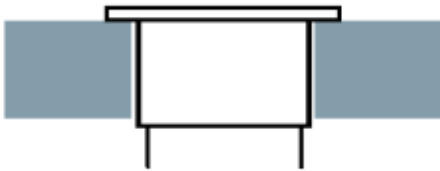

OPTION A
Standard Fit, Top Mounted with Standard Collar

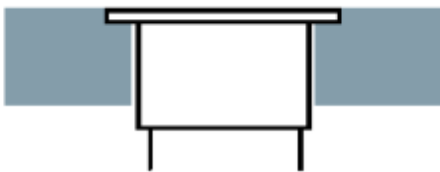

OPTION B
Flush with work surface. Approx. 3mm rebate. Standard Collar






OPTION C
Rebated for custom top (12mm max.) in 30mm or greater material.



OPTION D
Under-mounted for custom top (12mm max.) in 20mm material ONLY. *requires an undermount kit replacing standard collar*

IMPORTANT
EXISTING STAINLESS STEEL TOP MUST BE REMOVED BEFORE FITTING ANY ALTERNATIVE

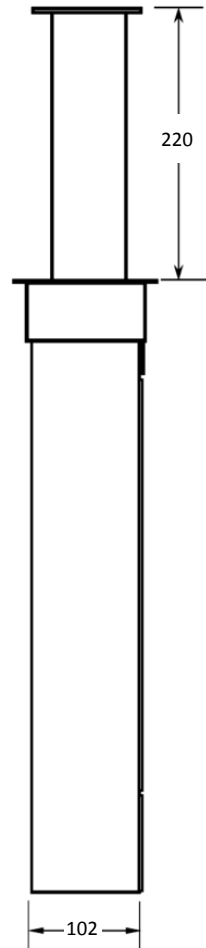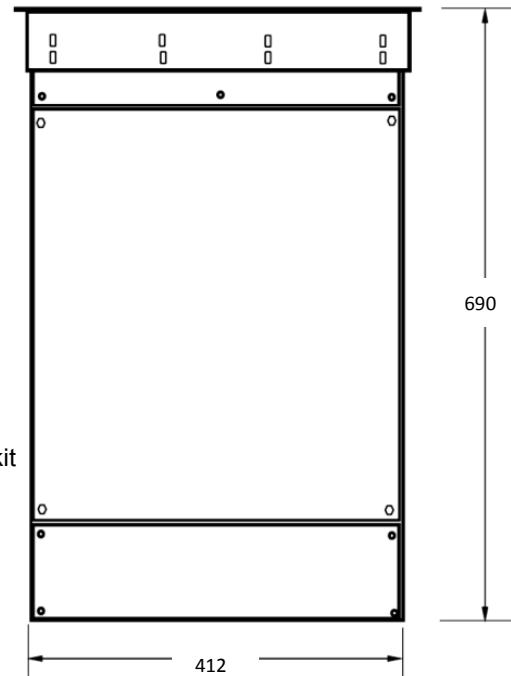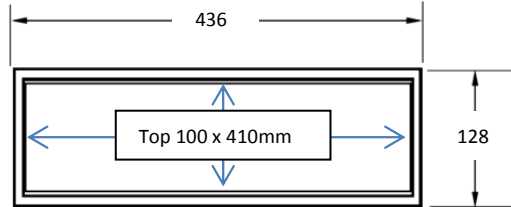

NOTE: Under-mounting kit should NOT be used unless access to its fittings are 100% available post-installation.



CUT OUT DIMENSIONS

OPTIONS A or B - 115mm x 425mm

OPTION C - As above plus additional 8mm rebate x 20mm deep

OPTION D - 103mm x 413mm (plus under-mount kit)